


# AMALIE

Better than it has to be<sup>®</sup>  
Since 1903




## UNIVERSAL SYNTHETIC CONTINUOUSLY VARIABLE TRANSMISSION FLUID (CVT)


**AMALIE Universal Synthetic CVT Fluid** is new technology, for a more powerful and more robust stand-alone Universal Synthetic CVT Fluid. As manufacturers began introducing the CVT into larger and more powerful vehicles; and as newer, more challenging CVT transmissions have been introduced into the marketplace, it became apparent that AMALIE had to take the bull by the horns and develop new, world-class CVT fluids that would meet all global CVT applications. The new **AMALIE Universal Synthetic CVT Fluid** is just such a product. It has been engineered to provide "Stay-In-Grade" viscosity, excellent oxidation stability, anti-wear and extreme pressure protection. Coupled with great new and improved seal-swell protection as well as superior wet clutch performance, this new technology gives the fluid wonderfully improved anti-shudder durability when compared with other CVT fluids.

**AMALIE Universal Synthetic CVT Fluid** is designed for the new CVT transmissions, whether chain or belt, that need a fluid that protects against metal-to-metal wear that leads to belt or chain deterioration. This new CVT fluid is engineered to offer the highest level of protection against metal-to-metal wear. Actual side-by-side tests prove that AMALIE's new fluid technology outperforms OEM CVT fluids and allows AMALIE to claim better protection against scuffing than many of these OEM fluids. Better anti-shudder performance and better anti-scuffing performance lead to longer life for transmissions, and quieter, more vibration-free operation. Like its big brother, AMALIE Universal Synthetic Automatic Transmission Fluid, the new **AMALIE Universal Synthetic CVT Fluid** takes the guesswork out of which CVT fluid to use in any CVT application; it is the most universal CVT fluid on earth and may be used in more applications than any other CVT fluid - one single fluid with superior technology for all CVT applications.



### UNPARALLELED METAL-TO-METAL-PROTECTION

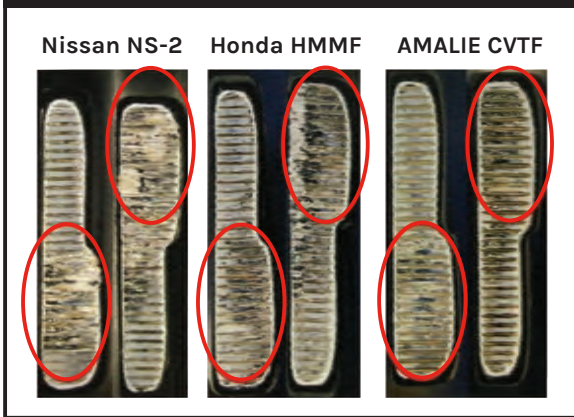

### IMPROVED ANTI-SHUDDER DURABILITY PERFORMANCE

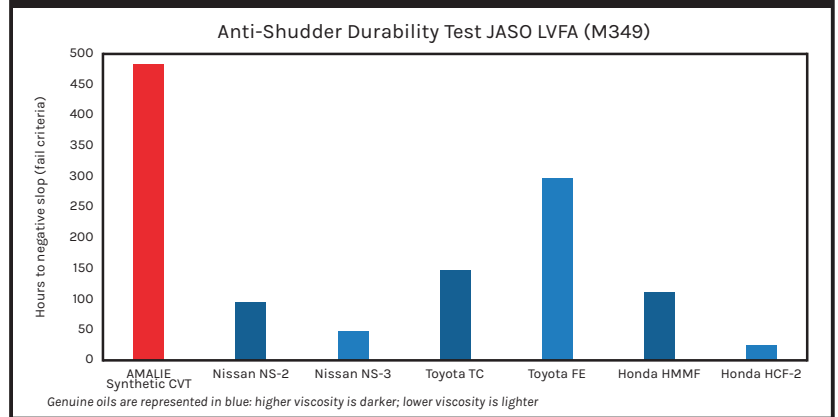

### STRONGER FRICTION PERFORMANCE

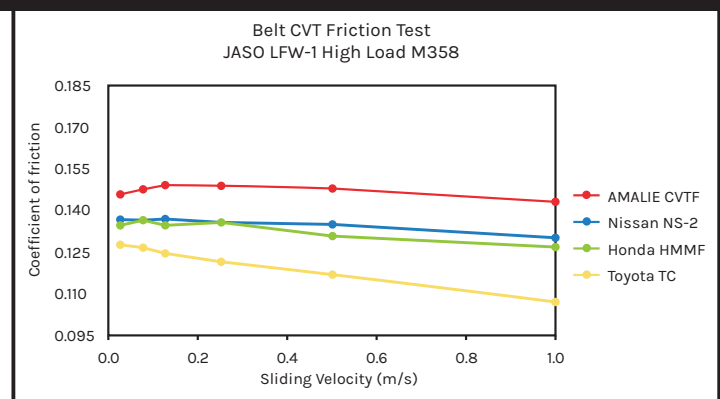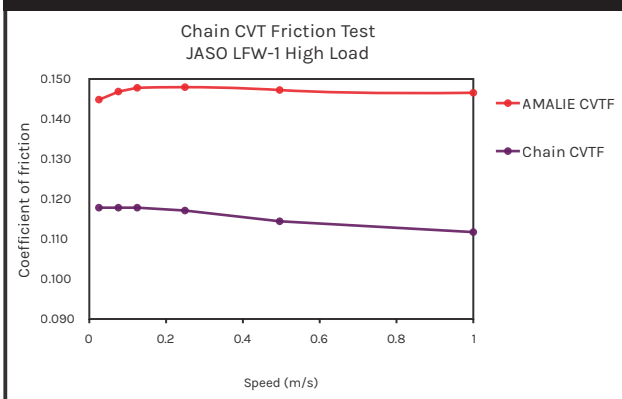

MADE IN U.S.A.



**UNIVERSAL SYNTHETIC CONTINUOUSLY  
VARIABLE TRANSMISSION FLUID (CVT)**

VISCOSITY	PACK SIZE	PART #
	12-1 Quart	160-72886-56
	55 Gallon Drum	160-72883-05



Always refer to your vehicles operating manual to select the correct grade of oil for your engine. The data presented herein are believed to be accurate; however, Amalie Oil Company shall not be liable for its content and makes no warranty with respect thereto.